


330 ft x 100 ft x 20 ft x 20 ft Flat Top Ballastable Barge

Price USD 2 million

Inspection: Batam

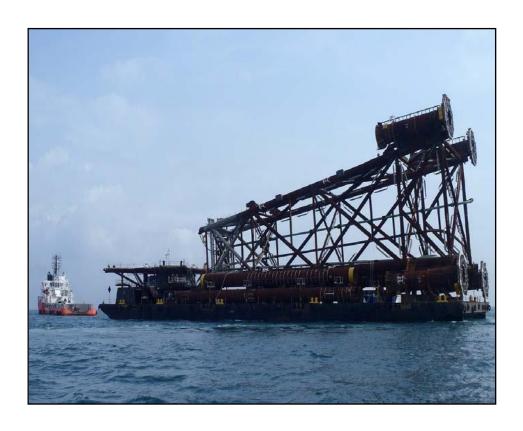

Length: 330 ft (100.61m)
Breadth: 100 ft (30.48 m)
Depth Moulded: 20 ft (6.1m)
Deck Strength: 15 mt/m2

GRT/NRT: 4,814 mt / 1,444 mt

Deadweight: 11,000 mt

Port of Registry/Flag Singapore

Official Number: 391480

Class: Lloyd's Register

Notation: +100A

Built: 2005 / Labroy Shipbuilding and Engineering Pte Ltd, Singapore



MINIMUM BREAKING STRENGTH FOR:

SMIT Towing Bracket 80 Tonnes Towing Fairlead 80 Tonnes

ADDITIONAL FEATURES:

- * Clear Deck Working Area of 305ft (93.0m) by 92ft (28.05m)
- *WEB Longitudinal Frame Spacing of 1.8ft (0.55m) each
- *WEB Transverse Frame Spacing of 6ft (1.83m) each
- * Flush-Deck with Recess Bollards
- * 12ft (3.66m) -high Break-Waters on the Bow with Storm Rails
- * Salvage Plugs in Manhole Covers
- * Flushed manholes marked with identification of each tank
- * Flush Access Ladder to Deck
- * Additional Bollard on the Bow
- * Fendering

Chain "pigtail"
Tow Plate (triangular pla

- * Emergency Tow-Set up clipped on Breakwaters from bow to stern arrangement with luminous float
- *Chain Bridle Assembly includes:

SMIT Brackets (tow connection point)

Master Links
Towing Shackles
Closed Chocks (capped fairleads)
Towing bridle legs (chain)